

TopCon TC.GSS.20.130.4WR.S

Programmable Grid-tie Source – Sink
Bidirectional High-Power DC Supply



TopCon GSS Power Supply unit with optional front panel control unit HMI

- TopCon Grid-tie Source Sink technology enables full bidirectional operation
- Compact design with integrated EMI - and Sine filters
- Constant voltage (0 – 100 %), constant current (0 – 100 %) and constant power operation (5 – 100%) with automatic and fast crossover and mode indication. Internal resistance simulation.
- Graduated product line: 65 V_{DC}, 130 V_{DC}, 400 V_{DC}, 500 V_{DC}, 600 V_{DC}, higher voltages with series connection up to 1500 V_{DC}. Power categories of 20 kW and 32 kW are available for each nominal output voltage.
- Optional extras and accessories complete the product line of power supply units.
- Modular concept for easy power increase: Parallel, series, matrix or multiload master-slave-operation.
- High efficiency at a low cost, resulting from the application of innovative IGBT and transformer technology. Primary switched. Galvanic isolated. Full digital control and regulation.
- A user-friendly PC program, the operating and service software TopControl, enables the user to communicate with the power supply.
- TopControl installation file, LabVIEW® and C/C++ C#/I.NET API (DLL file) are included in the scope of delivery.
- CE conformity
- Swiss made: Developed, manufactured and tested

Regatron AG
Kirchstrasse 11
CH-9400 Rorschach
Switzerland

Tel +41 71 846 67 67
Fax +41 71 846 67 77
www.regatron.com
topcon@regatron.ch

20 kW / 130 VDC / 192 A

Mains requirements and output specifications

AC lineside ratings

Line voltage / Line current relationship

.....	3 x 380 V _{AC} ± 10 % / 34 Arms ^{1) 3)}
.....	3 x 400 V _{AC} ± 10 % / 32 Arms ¹⁾
.....	3 x 415 V _{AC} ± 10 % / 31 Arms ¹⁾
.....	3 x 440 V _{AC} ± 10 % / 29 Arms ¹⁾
.....	3 x 460 V _{AC} ± 10 % / 28 Arms ¹⁾
.....	3 x 480 V _{AC} ± 10 % / 27 Arms ¹⁾

Line frequency 48 – 62 Hz

Mains connection type 3L+PE (no neutral)

Protective conductor current @ 50 Hz < 20 mA²⁾

Touch current unweighted < 20 mA²⁾

Touch current weighted < 2 mA²⁾

Powerfactor Q1/ Q4-mode ≥ 0.99
(At nominal power)

DC loadside ratings

Power range 0 kW – +/- 20 kW³⁾

Voltage range 0 VDC – 130 VDC

Current range 0 A – +/- 192 A³⁾

Internal resistance range 0 mΩ – 680 mΩ⁴⁾

Switchable output capacitance 1.4 mF/ 4.2 mF

Operating modes

Q1 mode source mode

Q4 mode regenerative/ sink mode

Voltage regulation (CV) 0 – 100 % U_{max}

Current regulation (CC) 0 – ± 100 % I_{max}

Power regulation (CP) 0 – ± 100 % P_{max}

Static accuracy

Load regulation CV, CC < ± 0.1 % FS⁵⁾

Line regulation CV, CC < ± 0.1 % FS⁶⁾

Transient response time

Load regulation CV < 1.1 ms⁷⁾

Set value tracking CV < 1.1 ms^{8) 11)}

Set value tracking CC:

-With quadrant change < 2 ms⁸⁾

-Without quadrant change < 2 ms⁸⁾

Stability

CV, CC < ± 0.05 % FS⁹⁾

Temperature coefficient

CV < 0.02 % FS / °C¹⁰⁾

CC < 0.03 % FS / °C¹⁰⁾

DC-side ripple Q1 / Q4 Mode

≤ 300 Hz V_{pp} < 0.2 % FS¹¹⁾

≤ 300 Hz V_{rms} < 0.05 % FS¹¹⁾

DC-side noise Q1 / Q4 Mode

40 kHz – 1 MHz V_{pp} < 0.2 V¹¹⁾

40 kHz – 1 MHz V_{rms} < 0.05 V¹¹⁾

Remote sensing

Terminals on rear side Load voltage drop
compensation


- 1) At nominal output power and nominal line voltage. Soft-start to limit turn-on surge currents.
- 2) According to IEC60990: Protective conductor current: 50 Hz component @400 VAC/50Hz/P_{nom}
For weighted touch current: Measured for perception/reaction
Protection with earth leakage circuit breaker possible. An additional PE connection is necessary.
- 3) Current according to the given power limit of the corresponding units. (P = V_{Load} * I_{Load} ≤ 20 kW; for I_{Load} > 154 A --> V_{Load} < 130 V).
Information about derating can be found on page 2.
- 4) The maximum value of the internal resistance is automatically calculated via the DC nominal values
(R_i [mΩ] = V_{Load} / I_{Load} = 130 VDC / 192 A) or limited by the maximum Ri-value: 32000 [mΩ].
- 5) Typical value for 0 – 100 % load variation, at constant line input and temperature conditions.
- 6) Typical value for input voltage variation within 380 VAC ± 10 % – 480 VAC ± 10 %, at constant load and temperature conditions.
- 7) Typical recovery time to within < ± 5 % band of set value for a load step 10 – 90 %, ohmic load, at constant line input and temperature conditions. Transient response time can be slightly affected by multi-unit operation.
- 8) Rise/ fall time for 10%-90% of a set step.
- 9) Maximum drift over 8 hours after 30 minute warm-up time, at constant line input, load and temperature conditions.
- 10) Typical change of output values versus ambient temperature, at constant line input and load conditions.
- 11) Typical value at nominal ohmic load, line asymmetry < 1 V_{rms}.

Non-ohmic loads can lead to deviations in the technical data. All product specifications are subject to change without notification.

General specifications

Efficiency at nominal power Q1/Q4	91.5 %/ 92 % ¹⁾
Weight	97 kg
Width front panel	483 mm
Width housing.....	(19") 444 mm
Height front panel	399 mm
Height housing.....	(9U) 394 mm
Depth with output terminals	634 mm
Depth housing	594 mm
Input connections:	terminal block 4 x 25 mm ²
DC terminals:	nickel-plated copper bars, length: 40 mm, 1 hole 9 mm Ø in each bar
Operating orientation.....	upside
Storage, transport orientation	upside

Operating range

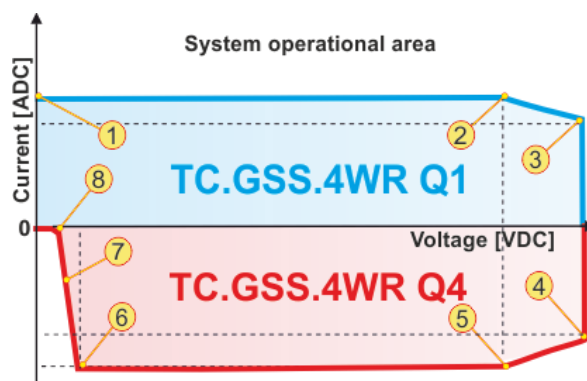

Q1 and Q4 range of device TC.GSS.20.130.4WR.S.

-1- :0 V / 192 A	-4- : 130 V / -154 A
-2- :104 V / 192 A	-5- : 104 V / -192 A
-3- :130 V / 154 A	-6- : 12 V / -192 A
.....	-7- : 9 V / -75 A
.....	-8- : 4 V / 0 A

Derating

Current derating

No current derating.

Power derating

No power derating.

Option airfilter derating

No derating.

Isolation

Line to case/logic.....	1670 VDC	1 s
Output to case/logic.....	2060 VDC	1 s
Transformer	4800 VAC	
Output to case	> 10 MΩ	
per DC bar.....	35 nF	
- bar ²⁾	+680 VDC / -680 VDC	
+ bar ²⁾	+680 VDC / -680 VDC	

Protection

Built-in protection

Overvoltage protection

(programmable)..... 0 – 110 % U_{max}
Overcurrent protection
(programmable)..... 0 – 110 % I_{max}
Max. reactive load voltage $\leq 110\%$ U_{max}
Reverse Polarity Protection RPP optional
Short circuit protection Cont. short circuit allowed
Islandig, grid off, requirements for the connection of
micro-generators in public grid according
VDE 0126/EN 50438.

Internal diagnostics

line input conditions, transformer primary current, temperature conditions, processor idle time, system configuration, system communication, sensor signals, power semiconductor temperatures.

Type of protection (according EN 60529)

Basic constructionIP 20 (current bars on rear side excluded)
Mounted in cabinet Up to IP 54

Conformity CE-Marking

EMC Directive

EMC emission	EN 61000-6-4
EMC immunity	EN 61000-6-2

Low Voltage Directive

Electronic equipment
for use in power installations EN 50178

Ambient conditions

Operating temperature 5 – 40 °C
Storage temperature..... -18 – 70 °C
Relative air humidity (non-condensing) 0 – 95 %

Cooling

Standard: Internal liquid cooling with completely integrated liquid to air heat-exchange system using temperature-controlled fans.

Optional: Integrated liquid cooling system of the power stage with completely integrated liquid to liquid heat-exchange system.

Heat exchanger

Material ³⁾ Stainless steel
Inlet/outlet on rear side size: G 1/2"
Liquid temperature..... 15 ⁴⁾ – 35 °C
Flow..... ≥ 3 l/min
Pressure max. 10 bar
Pressure drop 50 mbar@3 l/min

- 1) At 15 kHz switching frequency line side inverter.
- 2) Maximum working voltage including DC-Output Voltage.
- 3) Ni brazed, ready to use with deionized water.
- 4) 20 °C ambient temperature and ≤ 70 % relative air humidity.

Standard programming interfaces**Control port**

Isolation to electronics and earth: 125 Vrms
25 pin D-sub connector, female, on rear panel

Control port input functions

Output voltage off / on 0 / 24 VAC / DC
2 digital application inputs 0 / 24 VAC / DC ¹⁾
Interlock circuit 0 / 24 VDC
Voltage setting 0 – 100 % 0 V – 10 V
Current setting -100% – 100 % -10 V – 10 V
Power setting 0 – 100 % +10 V – 0 V ⁴⁾
Int. resistance setting 0% – 100% 0 V – 10 V

Control port output functions

Unit ready / error Relay contact
Output voltage on Relay contact
Warnings Relay contact
Actual voltage readback 0 – 100 % 0 V – 10 V
Actual current readback -100 % – 100 %
..... -10 V – 10 V
Resolution (programming and readback):
U, I, P, Ri 0.2 % FS

RS232

9 pin D-sub connector, female, on front panel
Isolation to electronics and earth 125 Vrms
Baud rate 38400 baud
Resolution (programming and readback):
U, I 0.025 % FS
P, Ri 0.1 % FS

Ordering Information**Ordering code**

TC.GSS.20.130.4WR.S(.Option)

Standard Scope of delivery

TopCon power supply unit ready to install, including:
..... Operating manual (English or German)
..... RS232 cable 1.8 m
..... Installation disc TopControl,
..... LabVIEW® and C/C++; C#/ .NET API (DLL file)

Options**Front panel control unit HMI**

Integrated control, programming and display unit with
graphic LC-Display, select wheel, push buttons and
interactive text menus
Languages (switchable) English, German
Display resolution:
U 4 digits
I 3 digits
P Kilowatt + 1 decimal digit
Ri 1 mΩ

Remote control unit RCU

Specifications same as HMI, available in 2 versions:
..... desk top and 19" rackmount
max. cable length 40 m
Desk top W x H x D 355 x 100 x 290 mm
19" rackmount W x H x D 483 x 88 (2 U) x 290 mm

Further options

TFEAAP ¹⁾ Function Generating Engine
Time-based and
parametric programming
SASControl ¹⁾ SAS application program
including TFEAAP
BatControl ¹⁾ Battery application program
BatSim ¹⁾ Battery simulation program
CapSim ¹⁾ Capacitor simulation program
RS232REAR ²⁾ RS-232 on front and rear panel
USB ³⁾ USB on rear panel
RS422 ²⁾ RS-422 on rear panel
ETHERNET ³⁾ Ethernet on rear panel
IEEE ³⁾ GPIB/ IEEE488.2/ SCPI on rear panel
... cannot be combined with CANOPEN nor with USB
CANOPEN ³⁾ CAN/ CANOPEN on rear panel
CANmp CANmp on rear panel
OptoLink ³⁾ OptoLink on rear panel
CANCABLE Connecting cable
..... for Multi-Unit Operation or RCU: 2, 5, 10 m
PACOB Protection against accidental contact
LCAL Integrated liquid cooling of the power
stage, inlet / outlet on rear side, size G 1/2"
AIRFILTER ⁵⁾ Front panel airfilter 9 U
ISR 2 channel Integrated Safety Relay
NSOV Non-Standard output voltage (if possible)

- 1) Customer-specifically programmable.
- 2) This option and RS232: time-shared mode required, if used together.
- 3) RS232 only on Rear Panel.
- 4) Bipolar power settings -10 V... +10 V possible with software configuration change
- 5) Information about derating can be found on page 2.