

Linear Post-Processor Unit

for Regatron Power Supplies




Linear Post-Processor Unit

Features

- The *Linear Post-Processor Unit* combines the advantages of a primary switched power supply like high efficiency, small outline, light weight, cost efficiency, with the fast, smooth linear controlled output capability of a linear power supply.
- To be used in combination with TopCon power supplies.
- Modular concept for easy power increase: Parallel, master-slave-operation of power supplies and *Linear Post-Processor Units*.
- Very fast digital controller features quick response time, enhanced dynamics and programmable control characteristics.
- User-friendly PC program available. This enables the user to communicate over the power supply to the *Linear Post-Processor Unit*.¹⁾
- Seamless integration into the well established TopControl software.
- Swiss made: developed, manufactured and tested in Switzerland by Regatron AG.

System Configuration (single Modules)

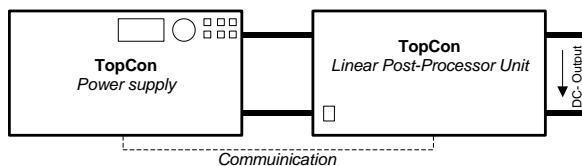

Regatron AG

Kirchstrasse 11
CH-9400 Rorschach
Switzerland
Tel +41 71 846 67 67
Fax +41 71 846 67 77
www.regatron.com
topcon@regatron.ch

26 A/13 A/1000 VDC

TC.LIN.SER.26.1000.26

Input requirements and output specifications

Mains input data (Auxiliary Supply)

| | |
|-------------------|--------------------------|
| Voltage | 85 – 264 V _{AC} |
| Frequency | 48 – 62 Hz |
| Input power | 120 W |

DC Input ratings

| | |
|--------------------------------|--------------------------|
| Input voltage | 0 – 1000 V _{DC} |
| Input current | 26 A _{DCmax} |
| Leakage current DC to PE | < 10 mA |

Output ratings

| | |
|---------------------------------|--|
| Output voltage range | 0 – 1000 V _{DC} ²⁾ |
| Drop Voltage (typical) | 50 V ³⁾ |
| Output current full range | 0 – 26 A ⁴⁾ |
| Output current half range | 0 – 13 A |
| Output Capacitor | < 10 nF |

Dissipation Power

| | |
|----------------------------|----------------------|
| Continuous power diss..... | 1500 W ⁵⁾ |
| Power diss. < 3 Min..... | 2000 W ⁶⁾ |
| Transient power diss..... | Full SOA protection |

Operating modes

| | |
|---|---|
| AAP ⁷⁾ current regulation..... | 0 – 100 % I _{max} @0 – (V _{max} -V _{Drop}) |
|---|---|

Resolution

| | |
|-----------------------------------|------------------------|
| Voltage, current resolution | 14.5 Bit ⁸⁾ |
|-----------------------------------|------------------------|

Static accuracy

| | |
|-----------------------|----------------------------------|
| Load regulation | < ± 0.05 % FS typ. ⁹⁾ |
| Line regulation | < ± 0.05% FS typ. ¹⁰⁾ |

Transient response time

| | |
|--------------------------|------------------------|
| Load regulation | < 10 µs ¹¹⁾ |
| Set value tracking | < 50 µs ¹²⁾ |

Stability

| | |
|-------|------------------------------|
| | < ± 0.02 % FS ¹³⁾ |
|-------|------------------------------|

Temperature coefficient

| | |
|------------------------|-------------------------------|
| Current, voltage | < 0.01 % FS/°C ¹⁴⁾ |
|------------------------|-------------------------------|

Remote sensing

| | |
|------------------------------|---------------------------------|
| Terminals on rear side | cable voltage drop compensation |
|------------------------------|---------------------------------|

General specifications

| | |
|------------------------------------|--|
| Weight..... | 23 kg |
| Width front panel | 483 mm |
| Width housing | 444 mm (19") |
| Height front panel..... | 265 mm |
| Height housing | 262 mm (6 U) |
| Depth with output terminals | 485 mm |
| Depth housing..... | 450 mm |
| DC input terminals max..... | 3 x 25 mm ² (DC+, DC-, PE) |
| DC Output terminals max | 3 x 25 mm ² (DC+, DC-, PE) |
| Remote Sensing terminals max | 2 x 10 mm ² (DC+,DC-) |

- 1) Most commonly used parameter are accessible via PC Program TopControl connected to TopCon power supply.
- 2) Maximum Output Voltage = Input Voltage – Drop Voltage.
- 3) Adjustable Value, the Drop Voltage influences directly the power dissipation.
- 4) Full Range / Half Range are selectable by PC program TopControl.
- 5) At ambient temperature 25 °C, for *current half range* 60 % of specified value.
- 6) For Drop Voltage < 250 V_{DC}, for *current half range* 50 % of specified value.
- 7) Application Area Programming, e.g. I(U) curves of solar panel / solar array.
- 8) Improved by using oversampling techniques.
- 9) Typical value for 60 % to 70 % load variation, at voltage drop and temperature conditions.
- 10) Typical value for variation within 20 V to 60 V drop voltage, at constant load and temperature conditions.
- 11) Typical recovery time to within < ± 2 % band of set value for a load step 60 % to 70 %, ohmic load, voltage drop > 30 V and constant temperature conditions.
- 12) Typical recovery time to within < ± 2 % band of set value for a set value step 60 % to 70 %, ohmic load, voltage drop > 30 V and constant temperature conditions.
- 13) Maximum drift over 6 hours after 30 minute warm-up time, at constant line input, load and temperature conditions.
- 14) Typical change of output values versus ambient temperature, at constant line input and load conditions.

Ambient conditions

Operating temperature 5 – 40 °C
 Storage temperature -25 – 70 °C
 Relative air humidity 0 – 95 %
 (non-condensing)

Cooling

Fans internal temperature-controlled

Safety**Type of protection (IEC 60529)**

Basic construction IP 20
 Mounted in cabinet up to IP 53

Isolation

Line to output (auxiliary supply) 4000 V_{rms}
 Line to case (auxiliary supply) 2500 V_{rms}
 DC-Input, Output to case: ± 1000 V_{DC}, > 10 MΩ

Conformity CE-Marking**EMC Directive**

EMC emission EN 61000-6-4
 EMC immunity EN 61000-6-2

Low Voltage Directive

Electronic equipment
 for use in power installations EN 50178

Standard programming interfaces**Control port**

Isolation to electronics and earth: 125 V_{rms}
 Connector 15 pin D-sub, female
 on rear panel

Control port

Input functions Future use
 Output functions Future use

Standard programming interfaces (continued)**RS232**

Isolation to electronics and earth: 125 V_{rms}
 Connector 9 pin D-sub, female
 on rear panel
 Baud rate 38400 baud
 Resolution (programming and readback):
 U, I 0.005 % FS

Ordering code

TC.LIN.SER.26.1000.26

Scope of delivery

TopCon Linear Post-Processor Unit ready to install,
 including:
 Operating manual language english
 RS232 cable length 1.8 m
 CAN bus CAN cable
 CANTerm Connector

Software

TopControl on Installation disc
 API (DLL file) for LabVIEW® and C/C++
 (and other programming languages,
 to be used in combination
 with TopCon Power Supplies.)