Sorensen SGX Series

4-150 kW

Programmable Precision High Power DC Power Supply

10-1000 V

- High Power Density: Up to 15 kW in 3U, 30 kW in a
- Wide Voltage Range: 0-10V up to 0-1000V, from
- Fast Load Transient Response: Protection from undesired voltage excursions
- Low Ripple and Noise
- Intuitive Touch Screen Display
- Parallelable up to 150 kW
- Sequencing: Free system controller & speed up test
- Low audible noise: Temperature controlled variable speed fans



Advanced Intelligent Control

The SGX combines onboard intelligent controls with the outstanding power electronics common to all SG family supplies. These controls enable sophisticated sequencing, constant power mode and save/recall of instrument settings. Looping of sequences makes the SGX ideal for repetitive testing.

The SGX Series is operated from the intuitive, easy-to-use front panel touch screen display. Quickly access output programming parameters, measurements, sequencing, configuration and system settings from the touch screen interface. Functions and parameters can be directly selected from the touch screen or by using the encoder selector button. The control resolution is adjusted by a dynamic rate change algorithm that combines the benefits of precise control over small parameter changes with quick sweeps through the entire range.

Additionally, the instrument can be controlled via LXI Ethernet and RS232 standard control interfaces, as well as through the optional GPIB control interface. 5-6000 A



208

400 480







Next Generation DC Supply

The Sorensen SGX Series represents the next generation of high power programmable DC power supplies. The SGX Series is designed for exceptional load transient response, low noise and the highest power density in the industry. With a full 15 kW available down to 20 V output in a 3U package the SGX leads the industry in power density. The power density is enhanced by a stylish front air intake allowing supplies to be stacked without any required clearance between units.

At the heart of the SGX series is a 5 kW power module. Depending on the output voltage, one to six modules can be configured in a single chassis to deliver 5 kW to 30 kW of power.

Combinations of these chassis can then be easily paralleled to achieve power levels up to 150 kW. Paralleled units operate like one single supply providing total system current.

AMETEK

Programmable Power 9250 Brown Deer Road San Diego, CA 92121-2267 USA



SGX Series : Product Specifications

Common										
line d		line drop 1\	erminals are provided to sense output voltage at point of load. Maximum line drop 5% of rated voltage per line for 40-100V models, line drop 1V of rated voltage per line for 10-20V models, 1.5V for 30V models, 2% of rated voltage per line for models 160V and greater. (Greater line drop is allowed, but output regulation specifications no longer apply).							
Parallel Operation		Up to 5 units may be paralleled for additional current within the power supply single-unit specifications, with exception of the DC output current set accuracy. Additional paralleled SG units will add 0.3% inaccuracy per unit. To parallel more than 5 units, contact factory.								
Series Operation		Up to 2 units	(see Output Float	: Voltage)						
Input										
Nominal Voltage 3 phase, 3 wire + ground		208/230VAC(operatingrange187-253VAC) 380/400VAC(operatingrange342-440VAC) 440/480VAC(operatingrange396-528VAC)								
Frequency		47 – 63Hz , 400Hz (400Hz @ 208VAC, for 6U units is optional modification and does not carry CE, UL or CSA markings)								
Power Factor (at full rated load; 50/60Hz)		0.90, typical, for all AC input ratings. Power factor is not solely determined by power supply input characteristics, but is dependent on the level of DC output power and interaction with the source impedance of AC mains.								
Protection (typical)			½ cycle ride-though, typical, on all three phases, 3 cycle ride through on single phase; missing phase shutdown (800V model 6.4 msec on all 3 phases)							
Programming 8	Read-back Spe	•		, ,	ed)					
		Programming			Read-Back/Monitor	ing				
	Accura		Resolution		Accuracy	Resolution	-			
Front Panel Display	SGX (40-1000V) +/- voltage at full sca SGX (40-1000V) +/- current atfull sca	le 0.4% of	SGX: 4.0 digits		tage: +/- 0.1% of full scale rent: +/- 0.4% of full scale	SGX: 4.0 digits	Knob control & Display read-back			
	SGX (10-30V) 0.1% of set point +0.1% of voltage rating SGX (10-30V) 0.1% of set point +0.4% of current rating				-30V) 0.1% of actual % voltage rating		Kilob Control & Display Feda Sack			
Remote Analog Interface	Voltage +/-0.25% of full scale Current (40-1000V) 0.8% of full scale , (10-30V) 1.0% of full scale		NA	(40-1000V) +/-1.0% of full scale (10-30V) +/-0.5% of full scale		NA	25-pin D-sub connector (0~5 V or 0~10 V)			
Remote Digital Interface		/oltage:+/-0.1% of full scale, Current:+/-0.4% of full scale full scale		Voltage: +/- 0.1% of full scale Current: +/- 0.4% of full scale		+/-0.002%of full scale	RS-232C (Standard on SGX), Optional IEEE-488.2 and Optional LXI Compliant 10/100 base-T Ethernet (see Options)			
OVP	+/- 1% of fullscale		+/-0.002% of full scale				Programming range: 5-110% Configure from front panel, remote analog or via optional digital inputs			
User I/O	Disconnect & Polari	ty-reversal relay	control (Only avai	lable with E	Ethernet Option)		Digital 10-pin Molex type connector			
Software	IVI & CVI drivers av	ailable under S	UPPORT at: www.	.Programn	nablePower.com					
Physical		3U _M	odels (10V-30\	V)	3U Models (40V	/-1000V)	6U Models (60V-600V)			
Width		19.00 in (48.3 cm)			19.00 in (48.3 cm)		19.00 in (48.3 cm)			
Depth		28.0 in (71.1 cm)			26.3 in (66.8 cm)		27.1 in (68.8 cm)			
Height		5.25 in (13.3 cm)			5.25 in (13.3 cm)		10.5 in (26.7 cm)			
Weight		(4kW, 10V 15V) ≈<65 lbs (29 kg) (5kW, 20V 30V) ≈<65 lbs (29 kg) (8kW, 10V 15V) ≈<85 lbs (39 kg) (10kW, 20V 30V) ≈<85 lbs (39 kg) (12kW, 10V 15V) ≈<110 lbs (50 kg) (15kW, 20V 30V) ≈<110 lbs (50 kg)			(5kW) ≈ ≤60 lbs (27 kg) (10kW) ≈ ≤75 lbs (34 kg) (15kW) ≈ ≤90 lbs (41 kg)		(20kW) ≈ ≤140 lbs (64 kg) (25kW) ≈ ≤155 lbs (71 kg) (30kW) ≈ ≤170 lbs (78 kg)			
ShippingWeight			ry for more produ	<u>.</u>	ping weights					


Output							
Ripple & Noise (Voltage Mode, Typical)	See Output: Voltage & Current Ranges Chart below. Ripple and noise specified at full load, nominal AC input. Noise measured with 6 ft. cable, 1µF at load						
Output Rise Time (40-1000V)	≈<100 ms 10-90% of full scale typical-full resistive load (Contact factory for model specifics lew rates)						
Outrout Valtage Rise Time (10, 20)	Rise Time, ms, m	ax	Condition				
Output Voltage Rise Time (10-30V)	10		Measuredfrom10%to90%oftheoutputvoltagechange-resistiveload,typical				
	Fall Time, ms max			Condition			
Output Voltage Fall Time (10-30V)	No Load	100% CC Load	100% CR Load	Measured from 90% to 10% of the output voltage change			
	50	10	10	resistive load, typical			
Output Current Rise Time (10-30V)	Rise Time, ms max		Condition				
Surput current insertime (10 300)	20		Measured from 109	% to 90% of the output current change - resistive load, typical			
Output Current Fall Time (10-30V)	Fall Time, ms max		Condition				
Output current Fail Time (10-30V)	10		Measured from 909	% to 10% of the output current change - resistive load, typical			
Line Regulation (with sense wires used)	(±10% of nominal AC input, constant load) Voltage Mode: +/-0.01% of full scale (40-800V) Current Mode: +/-0.05% of full scale (40-800V) Voltage Mode and Current Mode: +/-0.05% of full scale (10-30V)						
Load Regulation (with sense wires used) (no load to full load, nominal AC input). Voltage Mode: +/- 0.02% of full scale (40-800V)							
	Current Mode: +/- 0.1% of full scale Voltage Mode: +/- 0.05% of full scale (10-30V)						
Load Transient Response	Recovers within 1ms to +/-0.75% of full-scale of steady-state output for a 50% to 100% or 100% to 50% load change						
Efficiency	87% typical at nominal line and max load						
Stability	±0.05% of set point after 30 minute warm-up and over 8 hours at fixed line, load and temperature, typical						
Temperature Coefficient	0.02%/ C of maximum output voltage rating for voltage set point, typical 0.03%/ C of maximum output current rating for current set point, typical						
OutputFloatVoltage	Negative terminal within +/- 300 V of chassis potential. (We recommend the use of optional isolated analog Interface.) Supplies in "series" have a system current limit of the lowest current supply in the system.						

		3U		6U			Ripple & Noise	
Power	4/5 kW	8/10 kW	12/15 kW	16/20 kW	20/25 kW	24/30 kW	rms	p-p
Voltage		10	Cur	rent			(20 Hz-300 kHz)	(20 Hz-20 MHz)
10	400	800	1200	1600*	2000*	2400*	20 mV	50 mV
15	267	534	801	1068*	1335*	1602*	20 mV	50 mV
20	250	500	750	1000*	1250*	1500*	20 mV	60 mV
30	167	334	501	668*	835*	1002*	20 mV	60 mV
40	125	250	375	500*	625*	750*	20 mV	75 mV
50	100	200	300	400*	500*	600*	20 mV	75 mV
60	83	167	250	333	417	500	20 mV	75 mV
75	67	133	200	267	333	400	20 mV	100 mV
80	63	125	188	250	313	375	20 mV	100 mV
100	50	100	150	200	250	300	20 mV	100 mV
160	31	63	94	125	156	188	25 mV	150 mV
200	25	50	75	100	125	150	25 mV	175 mV
250	20	40	60	80	100	120	30 mV	200 mV
300	17	33	50	67	83	100	30 mV	200 mV
330	15	30	45	61	76	91	30 mV	200 mV
400	12	25	38	50	63	75	30 mV	300 mV
500	10	20	30	40	50	60	50mV	350 mV
600	8	17	25	33	42	50	60 mV	350 mV
800	6.2	12.5	18.7	25*	31.2*	37.5*	80 mV	500 mV
1000	5	10	15	20*	25*	30*	100 mV	650 mV


^{*} By way of paralleling 3U supplies

858.458.0223 sales.ppd@ametek.com

SGX Series: Product Diagram

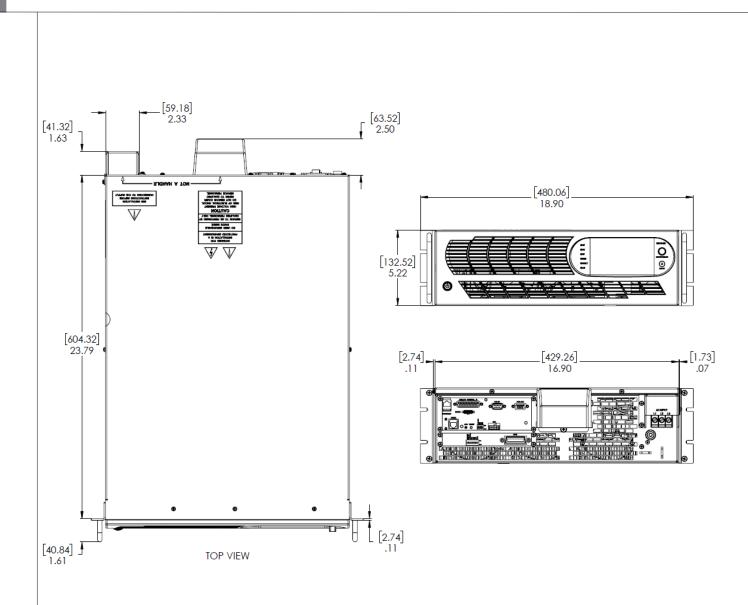

SGX Series 4–150 kW

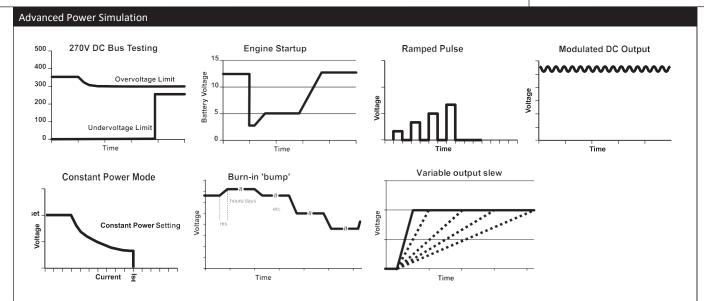


SGX model provides constant power mode allowing independent setting of the max voltage, current and power

SGX / SGI Comparison Chart				
Feature	SGX	SGI		
Modular Design	•	•		
Fast Load Transient	•	•		
Parallelable	•	•		
Analog & Digital Summing	•	•		
Direct Front Panel V/I Control	•	•		
Touch Screen	•			
Sequencing	•	•		
Save/Recall Setups	•	•		
System Power Readouts	•	•		
Constant Power Mode	•	•		
RS-232C	Standard	Standard		
LXI Class C Ethernet	Standard	Optional		
GPIB	Optional	Optional		

Environmental	
OperatingTemperature	0 to 50°C
StorageTemperature	-25º C to 65º C
Humidity Range	Relative humidity up to 95% non-condensing, 0° C − 50° C
Altitude	Operating full power available up to 5,000 ft. (~1,500 m), derate 10% of full power for every 1,000 feet higher; non-operating to 40,000 ft. (~12,000 m)
Cooling	Front and side air inlet, rear exhaust. Temperature controlled, variable speed fans. Units may be stacked without spacing.
Regulatory	Certified to UL/CSA 61010 and IEC/EN 61010-1 by a NRTL, CE Compliant, Semi-F47 Compliant. LVD Categories: Installation Category II: Pollution Degree 2; Class II Equipment: for Indoor Use Only, back panel not user accessible (see user manual for installation instructions) EMC Directive, EN 61326:1998
Front Panel Dust Filter (Consult Factory)	30 PPI (Pores Per Inch) - must ensure adequate airflow and / or derate max. temperature. 3U unit only.

SGX Series

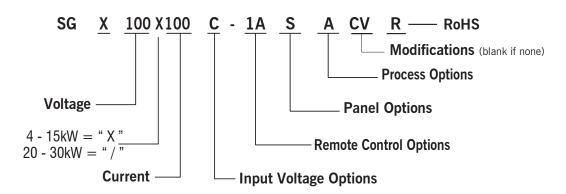

(For units with greater than 3 digits, Voltage/Current is represented in numeric format, e.g., above "100" represents 100A. For units at 1000 and above, the voltage is represented by the format "XKX", e.g, 1K2 = 1200V and 1K0 = 1000V)

Input Voltage Options	C:InputVoltage187/242VAC,3Phase	
input voitage Options	D: Input Voltage 342 / 440VAC, 3 Phase	
	E:InputVoltage 396/528VAC, 3 Phase	
Remote Control Options	OA: No Option 1A: IEEE-488.2+RS-232C (Note:SGX comes standard with RS-232C and Ethernet) 1D: Isolated Analog Control 2A: Combined Options 1A+1D	
Panel Options	S: Standard N: No Display	
Process Options	A: No option B: Certificate of Calibration to ANSI / NCSL Z540-1 (includes Test Data)	
Modifications	CV: 400Hz AC input @ 208 VAC (does not carry CE, CSA or UL marks) (6U only) STD on 3U Blank if no modifications	
RoHS	R: RoHS is standard (must include in part number)	
Accessories	890-453-03: Paralleling Cable (for up to 5 units, requires one cable per unit placed in parallel) K550212-01R: 3U Rack Slides (for 5kW, 10kW and 15kW models) K550213-01R: 6U Rack Slides (for 20kW, 25kW and 30kW models) 5551082-01R: Optional AC input cover kit - 3U unit only	

© 2018 AMETEK Programmable Power All rights reserved. AMETEK Programmable Power is the trademark of AMETEK Inc., registered in the U.S. and other countries. Elgar, Sorensen, California Instruments are trademarks of AMETEK Inc., registered in the U.S.